




$\phi 14.5<(.571)>$   
 $23.6 \pm 0.5<(.929 \pm .020)>$   
 $\phi 3.9_{-0.1}^{+0.1}<(.154_{-0.004}^{+0.004})>$  REF.

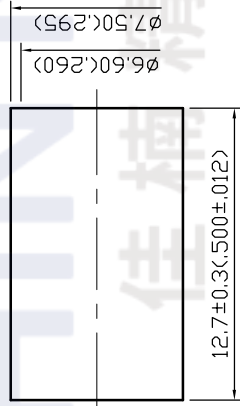

$\phi 0.900<(.035)>$   
 $11.90<(.469)>$



STRIPPING DIMENSION

- 1.0 ELECTRICAL**
  - 1.1 FREQUENCY RANGE: DC-4 GHz
  - 1.2 NOMINAL IMPEDANCE: 75 OHM
  - 1.3 VOLTAGE RATING: 300 VOLTS MAX.
  - 1.4 VSWR: 1.1 MAX.
- 2.0 MATERIALS**
  - 2.1 BODIES: BRASS PER JIS-C3604
  - 2.2 CENTER CONTACT: BRASS PER JIS-C3604
  - 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
  - 2.4 CRIMP FERRULE: BRASS PER JIS-C2700
- 3.0 FINISHES AND OTHERS**
  - 3.1 SEE BELOW TABLE FOR DETAILS.
- 4.0 MECHANICAL**
  - 4.1 FOR USE WITH 1505A OR SIMILAR STYLE CABLE
  - 4.2 CABLE ATTACHMENT: OUTER: CRIMP, INNER: SOLDER
  - 4.3 CRIMP SIZE REQUIRED: FERRULE :6.5(.256) HEX. CRIMP TOOL
- 5.0 ENVIRONMENTAL**
  - 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

| NO | DESCRIPTION    | MATERIAL | Q'TY | FINISH             |
|----|----------------|----------|------|--------------------|
| 9  | CENTER CONTACT | BRASS    | 1    | GOLD               |
| 8  | CRIMP FERRULE  | BRASS    | 1    | NICKEL             |
| 7  | SHELL          | ZINC     | 1    | NICKEL             |
| 6  | INSULATION     | TEFLON   | 1    | NONE               |
| 5  | GASKET         | SILICONE | 1    | NONE               |
| 4  | WASHER         | BRASS    | 1    | NICKEL             |
| 3  | SPRING WASHER  | SK-5     | 1    | NICKEL             |
| 2  | WASHER         | BRASS    | 1    | NICKEL             |
| 1  | BODY           | BRASS    | 1    | NICKEL 100 μ" MIN. |

| DRAWN |       | TOLERANCE |                | 品名      |                | BELDEN    |    | DATE |    | REV. |    |
|-------|-------|-----------|----------------|---------|----------------|-----------|----|------|----|------|----|
| 製圖    | 檢圖    | 檢圖        | 檢圖             | 檢圖      | 檢圖             | 檢圖        | 檢圖 | 檢圖   | 檢圖 | 檢圖   | 檢圖 |
| Leona | XX    | ±0.2      | 40130108023013 | 1505A   | 40130108023013 | 05.17.10' | 次  | A-3  |    |      |    |
| Amey  | XX    | ±0.1      | ROHS COMPLIANT | (75Ω)   |                |           |    |      |    |      |    |
| Jenny | XXX   | ±0.05     | UNIT           | DWG.NO. | 13-0231        |           |    |      |    |      |    |
|       | ANGLE | ±5°       | SCALE          | 比例      | 4:1            |           |    |      |    |      |    |

DESCRIPTION BNC STRAIGHT PLUG CRIMP



佳楠精密電子  
 CHIN NAN PRECISION ELECTRONICS CO.,LTD.