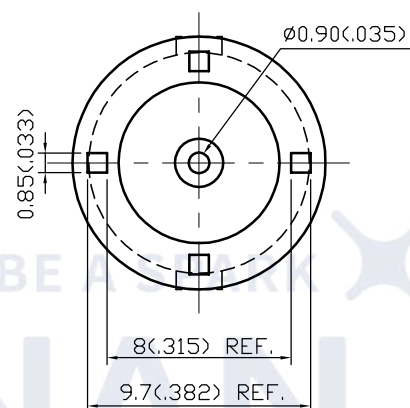
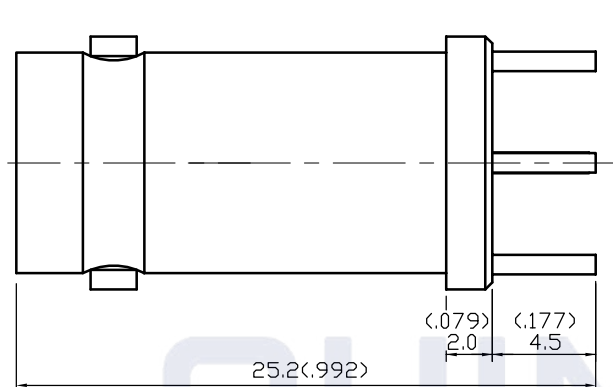



(4) $\phi 1.4<.055>$ MIN.
(1) $\phi 1.1<.043>$ MIN.
MOUNTING HOLE

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-6 GHz
- 1.2 NOMINAL IMPEDANCE: 75 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX.
- 1.4 VSWR: 1.3 MAX.

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348B

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

5	INSULATION	TEFLON	1	NONE
4	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD 3 μ " MIN.
3	INSULATION	TEFLON	1	NONE
2	WASHER	BRASS	1	NICKEL
1	BODY	BRASS	1	NICKEL 100 μ " MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

DESCRIPTION		BNC STRAIGHT PCB MOUNT JACK RECEPTACLE										
製圖	DRAWN	TOLERANCE		品名		40130208300019	日期	DATE		版次	REV.	
	Jackie							04.29.16'				A-1
檢圖	CHECK	.XX	±0.1	TITLE		\ROHS COMPLIANT <75Ω>		DWG.NO. 13-0693				
	Arc											
認定	APPROVAL	.XXX	±0.05	單位	mm(in)		比例					
	SCALE											
	4:1											
Jenny		ANGLE ±5°		佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.								



佳楠精密電子股份有限公司
CHIN NAN PRECISION ELECTRONICS CO.,LTD.