
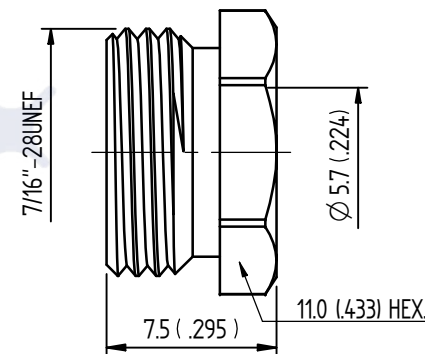
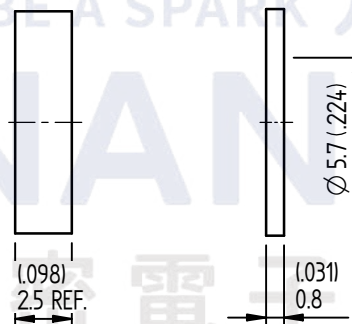






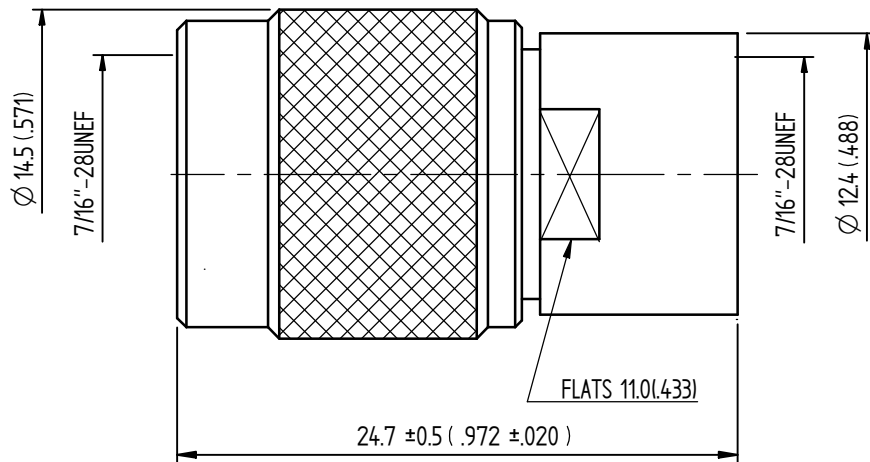

STRIPPING DIMENSION

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-11 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX.
- 1.4 VSWR: 1.3 MAX.

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348B
- 4.2 FOR USE WITH RG58U OR SIMILAR STYLE CABLE
- 4.3 CABLE ATTACHMENT: OUTER: CLAMP, INNER: SOLDER
- 4.4 RECOMMENDED COUPLING TORQUE: 4 TO 6 in-lbs

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

10	NUT	BRASS	1	NICKEL 100 μ " MIN.
9	WASHER	BRASS	1	NICKEL 100 μ " MIN.
8	GASKET	SILICONE	1	RED
7	BRAID CLAMP	BRASS	1	NICKEL 100 μ " MIN.
6	CENTER CONTACT	BRASS	1	GOLD 3 μ " MIN.
5	WASHER	BRASS	1	NONE
4	GASKET	SILICONE	1	RED
3	BODY	BRASS	1	NICKEL 100 μ " MIN.
2	INSULATION	TEFLON	1	NONE
1	SHELL	BRASS	1	NICKEL 100 μ " MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

DESCRIPTION			TNC STRAIGHT PLUG CLAMP							
製圖	DRAWN	TOLERANCE		品名	40150108108011	58U	日期	DATE	版次	REV.
	Leona	.X	±0.2	TITLE	ROHS COMPLIANT	(50Ω)	04.24.19'	A-0		
檢圖	CHECK	.XX	±0.1	單位	UNIT	DWG.NO.	15-0285			
	Jenny	.XXX	±0.05		mm(in)					
認定	APPROVAL	.XXX	±0.05	比例	SCALE	CHIN NAN 佳楠精密電子 PE A GRADE  佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.				
	Jenny	ANGLE	± 5°		1:1					



佳楠精密電子股份有限公司
CHIN NAN PRECISION ELECTRONICS CO.,LTD.