
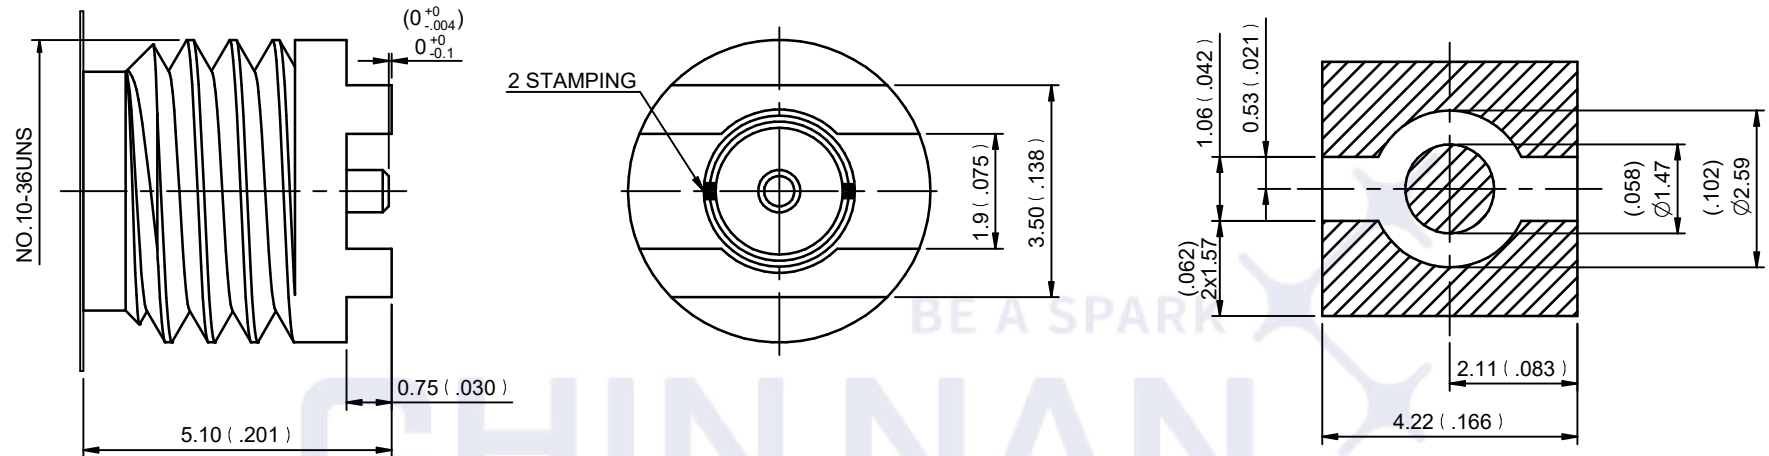




RECOMMENDED LAND PATTERN

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-12 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 250 VOLTS MAX.
- 1.4 VSWR: 1.22 MAX. @6 GHz

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: BS EN 122340

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -55° C TO +155° C

4	TAPE	PI	1	NONE
3	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD 30 μ " MIN.
2	INSULATION	TEFLON	1	NONE
1	BODY	BRASS	1	GOLD 3 μ " MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

DESCRIPTION		ANTI - VIBRATION MMCX STRAIGHT SURFACE MOUNT JACK RECEPTACLE								
製圖	DRAWN	TOLERANCE		品名	40370208300013		日期	DATE	版次	REV.
	Jackie									
檢圖	CHECK	.X	±0.2	單位	UNIT	DWG.NO.	37-0095-Z			
	mm(in)									
認定	APPROVAL	.XXX	±0.05	比例	SCALE	RE- A DRAWN CHIN NAN 佳楠精密電子 佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.				
	Jenny									