
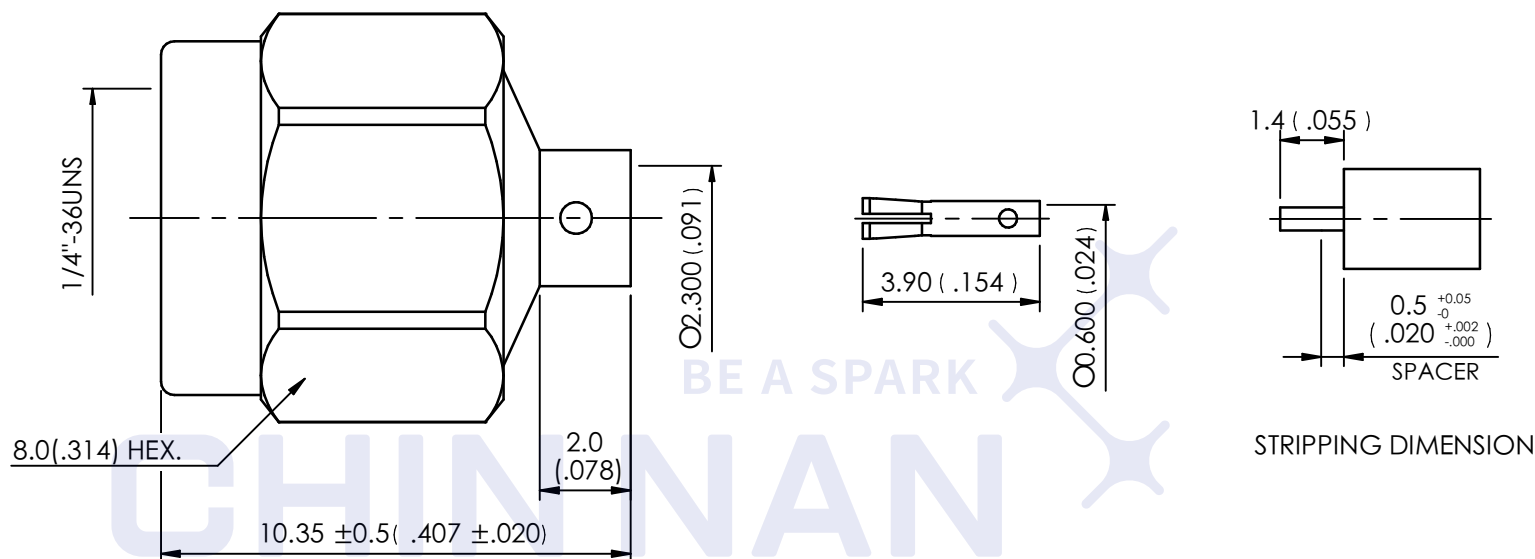




1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-18 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 335 VOLTS MAX.
- 1.4 VSWR: 1.3 MAX.

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
BERYLLIUM COPPER PER ASTM B196 UNS C17300
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A
- 4.2 FOR USE WITH RG405 OR SIMILAR STYLE CABLE
- 4.3 CABLE ATTACHMENT: OUTER: SOLDER, INNER: SOLDER
- 4.4 RECOMMENDED COUPLING TORQUE: 3 TO 5 in-lbs

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

9	CENTER CONTACT	BERYLLIUM COPPER	1	GOLD 30μ" MIN.
8	BODY	BRASS	1	GOLD 3μ" MIN.
7	SHELL	BRASS	1	GOLD 3μ" MIN.
6	WASHER	STAINLESS STEEL	1	GOLD 3μ" MIN.
5	CHASSIS	BERYLLIUM COPPER	1	GOLD 3μ" MIN.
4	GASKET	SILICONE	1	RED
3	ANTI - ROCK RING	BERYLLIUM COPPER	1	GOLD 3μ" MIN.
2	EMI RING	BERYLLIUM COPPER	1	GOLD 3μ" MIN.
1	INSULATION	TEFLON	1	NONE
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

DESCRIPTION		ANTI - VIBRATION SMP STRAIGHT JACK SOLDER							
製圖	DRAWN	TOLERANCE		品名	40480208220003	RG405	日期	DATE	版次
	Jackie	.X	±0.2	TITLE	\ROHS COMPLIANT	(50Ω)	12.05.17	12.05.17	A-0
檢圖	CHECK	.XX	±0.1	單位	mm(in)	DWG.NO. 48-0030-Z			
	Arc	.XXX	±0.05	比例	SCALE				
認定	APPROVAL	ANGLE	± 5°						
	Jenny								



佳楠精密電子股份有限公司
CHIN NAN PRECISION ELECTRONICS CO.,LTD.