
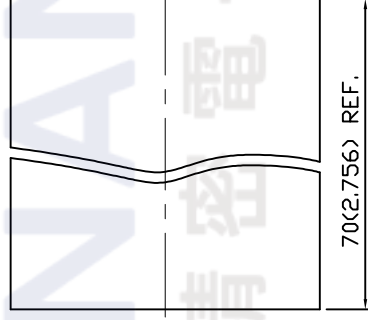



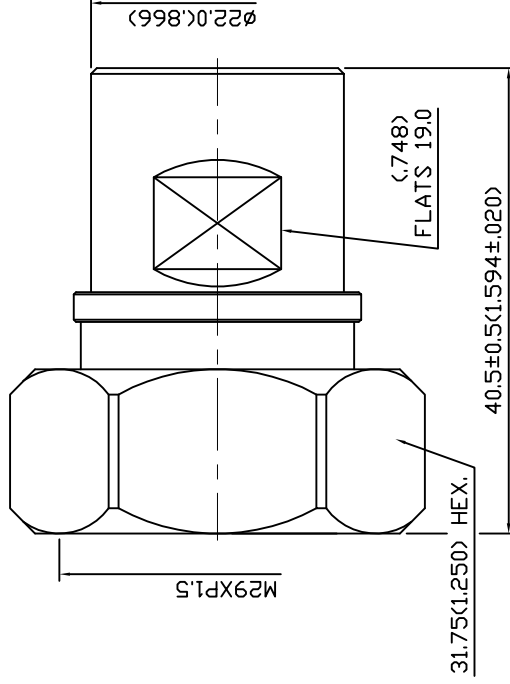

5.1 OPERATING TEMPERATURE RANGE: -55° C TO +155° C

1.1 FREQUENCY RANGE: DC-7.5 GHz
1.2 NOMINAL IMPEDANCE: 50 OHMS
1.3 VOLTAGE RATING: 1000 VOLTS MAX.
1.4 VSWR: 1.1 MAX. @3 GHz
1.22 MAX. @6.1 GHz

2.1 BODIES: BRASS PER JIS-C3604

3.0 FINISHES AND OTHERS

4.0 MECHANICAL

4.2 FOR USE WITH LMR400 OR SIMILAR STYLE CABLE

5.0 ENVIRONMENTAL

5.1 OPERATING TEMPERATURE RANGE: -55° C TO +155° C

12	HEAT SHRINK TUBE	PE	1	BLACK (ADHESIVE SHRINK)
11	NUT	BRASS	1	WHITE BRONZE 80 μ" MIN.
10	WASHER	BRASS	1	WHITE BRONZE 80 μ" MIN.
9	GASKET	SILICONE	1	RED
8	BRAID CLAMP	BRASS	1	WHITE BRONZE 80 μ" MIN.
7	BODY	BRASS	1	WHITE BRONZE 80 μ" MIN.
6	INSULATION	TEFLON	1	NONE
5	CENTER CONTACT	BERYLLIUM COPPER	1	SILVER 70 μ" MIN.
4	O-RING	SILICONE	1	BLACK
3	O-RING	SILICONE	1	RED
2	BODY	BRASS	1	WHITE BRONZE 80 μ" MIN.
1	SHELL	BRASS	1	WHITE BRONZE 80 μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

DESCRIPTION		7/16 STRAIGHT PLUG CLAMP										
製圖	DRAWN	TOLERANCE		品名		40620108117002		LMR400	日	DATE	版	REV.
	Frank	X	±0.2	TITLE		ROHS COMPLIANT		<500>	期	01.19.21	次	A-0
檢圖	CHECK	XX		UNIT		DWG.NO.		62-0006-5G				
	Jenny	±0.1		mm(in)								
認定	APPROVAL	XXX		SCALE								
	Jenny	ANGLE ±5°		比例		2:1						
 佳楠精密電子 CHIN NAN 佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO., LTD.												