

PRODUCT SPECIFICATIONS

N Right Angle Plug Clamp For RG 213U 、RG 214U 、RG 393U Cable

40110308116001



Electrical

Impedance	50 Ω
Frequency Range	DC-11 GHz
V.S.W.R	1.2 Max. @6 GHz 1.5 Max. @11 GHz
Insertion Loss	0.3 dB Max. @10 GHz
Voltage Rating	1000 volts rms. at sea level
Dielectric Withstanding Voltage	2500 volts rms. at sea level
Insulation Resistance	5000 Megohms Min.
Contact Resistance	Center contact = 1.0 Milliohms Max. Outer contact = 1.0 Milliohms Max.
Power Handling	1200W

Mechanical

Mechanical	5/8"-24 Threaded coupling
Durability	500 Cycles
Cable retention	80 lbs Min.
Center Contact Retention	6 lbs Min. Axial force
Coupling Proof Torque	15 in-lbs Min.
Recommended Coupling Torque	12~15 inch-lbs
Recommended Clamp Nut Torque	60~65 inch-lbs

Material

Connector Body	Brass
Center Contact	Brass
Insulation	PTFE
Gasket	Silicone

Environmental

Temperature	-65°C to 165°C
Vibration	Refer to MIL-STD-202 Method 204 Test Cond. B.
Salt Spray	Refer to MIL-STD-202 Method 101 Test Cond. B.

Related Documents

Assembly instructions	CM-07
-----------------------	-------

Test Report


S11 FORWARD REFLECTION

FGT

SWR

REF=1.000 U

100.000 mU/DIV

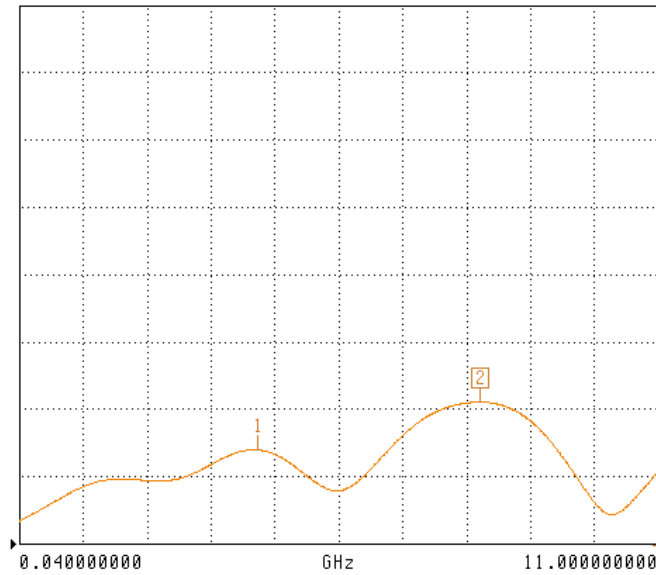

CH 3 - S11
0.0000 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 2
7.944900000 GHz
1.210 U

▶ MARKER TO MAX
MARKER TO MIN

1 4.136300000 GHz
1.139 U

MARKER READOUT
FUNCTIONS