

# PRODUCT SPECIFICATIONS

## **BNC Straight Bulkhead Jack Crimp for RG 174 or RG 316 or RG188 or LMR100A cable**

[40130208005034](#)



### Electrical

Impedance	50 Ω
Frequency Range	DC-4 GHz
V.S.W.R	1.22 MAX
Insertion Loss	0.2 dB max.@3GHz
Voltage Rating	500 volts rms. at sea level
Dielectric Withstanding Voltage	1500 volts rms. at sea level
Insulation Resistance	5000 Megohms min
Contact Resistance	Center contact = 1.5 Milliohms max. Outer contact = 0.2 Milliohms max.
Power Handling	500W

### Mechanical

Mechanical	Bayonet locking
Durability	500 Cycles
Cable retention	15 lbs min.
Center contact retention	6 lbs min. Axial force
Torque	NONE
Recommended Torques	NONE
Panel nut	35~40 inch-lbs
Clamp nut	NONE

### Material

Connector Body	Brass
Center Contact	Beryllium Copper
Insulation	PTFE
Gasket	Silicone

### Environmental

Temperature	-65°C to 165°C
Vibration	Refer to MIL-STD-202 Method 204 Test Cond. B.
Salt Spray	Refer to MIL-STD-202 Method 101 Test Cond. B.

### Related Documents

Assembly instructions	CM-03
-----------------------	-------

# Test Report

S11 FORWARD REFLECTION


FGT

CH 3 - S11  
0.0000 mm REF  
0.000 dB OFFSET  
0.00° OFFSET

SWR

REF=1.000 U

100.000 mU/DIV

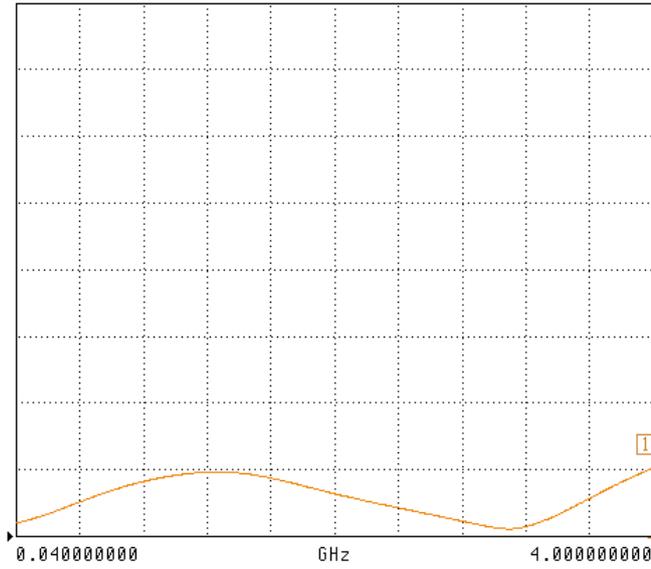

▶ MARKER TO MAX  
MARKER TO MIN

MARKER READOUT  
FUNCTIONS