

PRODUCT SPECIFICATIONS

TNC Straight Bulkhead Jack Crimp For RG 174 Or RG 316 Or RG188 Or LMR100 Cable

40150208005015



Electrical

Impedance	50 Ω
Frequency Range	DC-11 GHz
V.S.W.R	1.3 max.
Insertion Loss	0.18 dB max. @9GHz
Voltage Rating	500 volts rms. at sea level
Dielectric Withstanding Voltage	1500 volts rms. at sea level
Insulation Resistance	5000 Megohms min.
Contact Resistance	Center contact = 1.5 Milliohms max. Outer contact = 0.2 Milliohms max.
Power Handling	500W

Mechanical

Mechanical	7/16" -28 Threaded coupling
Durability	500 Cycles
Cable retention	15 lbs min.
Center Contact Retention	6 lbs min. Axial force
Recommended Panel Nut Torque	35~40 inch-lbs

Material

Connector Body	Brass
Center Contact	Beryllium Copper, Brass
Insulation	PTFE
Gasket	Silicone

Environmental

Temperature	-65°C to 165°C
Vibration	Refer to MIL-STD-202 Method 204 Test Cond. B.
Salt Spray	Refer to MIL-STD-202 Method 101 Test Cond. B.

Related Documents

Assembly Instructions	CM-03
-----------------------	-------

Test Report

S11 FORWARD REFLECTION

FGT

CH 3 - S11
0.0000 mm REF
0.000 dB OFFSET
0.00° OFFSET


SWR

REF=1.000 U

100.000 mU/DIV

MARKER 1
6.054300000 GHz
1.208 U

▶ MARKER TO MAX
MARKER TO MIN

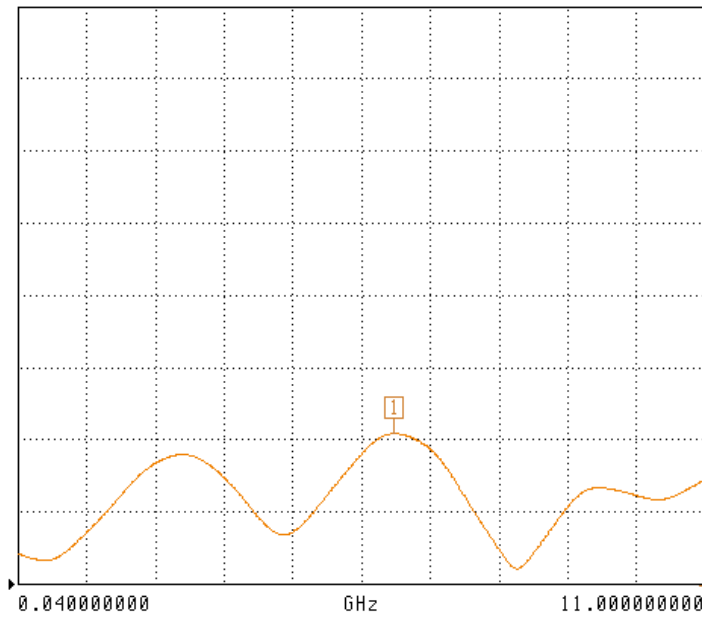

MARKER READOUT
FUNCTIONS