

PRODUCT SPECIFICATIONS

Straight Slide-on SMA Plug to Bulkhead SMA Jack Adapter

40191101900001 (19-87-TGGX)



Electrical

Impedance	50 Ω
Frequency Range	DC to 18 GHz
V.S.W.R	1.12 max. @6 GHz 1.23 max. @18 GHz
Insertion Loss	0.6 dB max.
Voltage Rating	335 volts rms. at sea level
Dielectric Withstanding Voltage	1,000 volts rms. at sea level
Insulation Resistance	5,000 Megohms min.
Contact Resistance	Center contact = 6.0 Milliohms max. Outer contact = 4.0 Milliohms max.
Power Handling	220W

Mechanical

Mechanical	1/4"-36 Threaded coupling
Durability	500 Cycles
Center contact retention	6 lbs Axial force
Panel nut	15~18 inch-lbs

Material

Connector Body	Stainless Steel / Beryllium Copper
Center Contact	Beryllium Copper
Insulation	PTFE
Gasket	Silicone

Environmental

Temperature	-65°C to 165°C
Vibration	Refer to MIL-STD-202 Method 204 Test Cond. B.
Salt Spray	Refer to MIL-STD-202 Method 101 Test Cond. B.


Test Report

S11 FORWARD REFLECTION

SWR

REF=1.000 U

100.000 mU/DIV

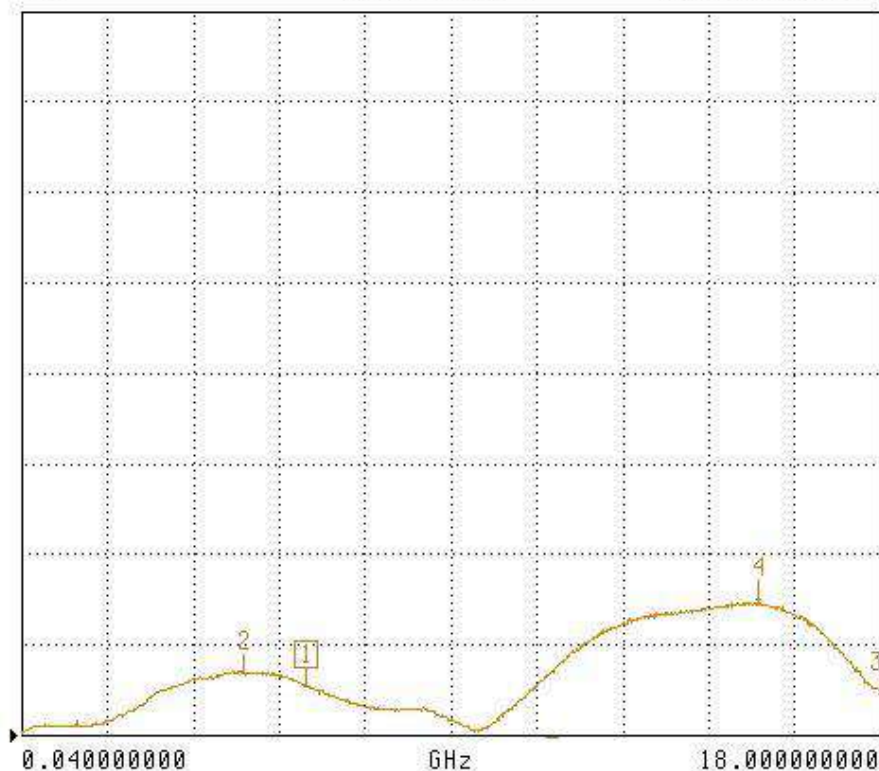

CH 1 - S11
0.0000 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 1
6.011700000 GHz
1.054 U

MARKER TO MAX
MARKER TO MIN

2 4.687150000 GHz
1.069 U

3 18.000000000 GHz
1.046 U

4 15.463150000 GHz
1.149 U

MARKER READOUT
FUNCTIONS