

PRODUCT SPECIFICATIONS

Low PIM

Straight N Plug Clamp for LDF4-50A 1/2" Corrugated Cable

40610108127001(61-02AI-TSWB)



Electrical

Impedance	50 Ω
Frequency Range	DC to 6 GHz
V.S.W.R	1.05 max. @2 GHz
	1.1 max. @3 GHz
Insertion Loss	0.3 dB max.
Voltage Rating	1,000 volts rms. at sea level
Dielectric Withstanding Voltage	2,500 volts rms. at sea level
Insulation Resistance	5,000 Megohms min.
Contact Resistance	Center contact = 1.0 Milliohms max.
	Outer contact = 1.0 Milliohms max.
Power Handling	1200W

Mechanical

Mechanical	5/8"-24 Threaded coupling
Durability	500 Cycles
Center contact retention	6 lbs Axial force mating end
Torque	15 in-lbs min.
Recommended Torques	12~15 inch-lbs
Clamp nut	16 inch-lbs

Material

Connector Body	Brass
Center Contact	Beryllium Copper
Insulation	PTFE
Gasket	Silicone

Environmental

Temperature	-40°C to 85°C
Vibration	Refer to MIL-STD-202 Method 204 Test Cond. B.
Salt Spray	Refer to MIL-STD-202 Method 101 Test Cond. B.

Related Documents

Assembly instructions	<u>CM-45</u>
-----------------------	------------------------------

Test Report


S11 FORWARD REFLECTION

FGT

SWR

REF=1.000 U

100.000 mU/DIV

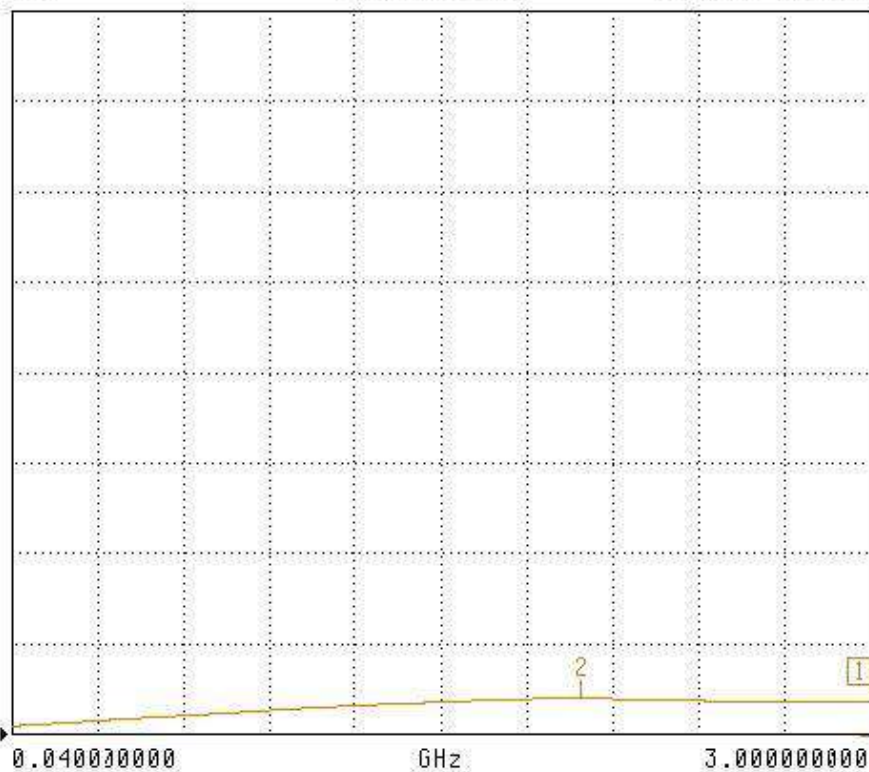

CH 3 - S11

0.0000 mm REF

0.000 dB OFFSET

0.00° OFFSET

MARKER 1

3.000000000 GHz

1.036 U

▶ MARKER TO MAX

MARKER TO MIN

2 2.001000000 GHz

1.038 U

MARKER READOUT
FUNCTIONS